



# NEW FROM SOLAX T-BAT-CHARGER



**T-BAT-CHARGER**

## Features

- **Instant Power-Up**  
Direct charging, bypassing inverters – efficient and straightforward.
- **Global Voltage Range**  
Designed for 180-264V compatibility – suitable for worldwide use.
- **Precise Charge Control**  
Offers 1% precision in charge control, enabling uniform SOC across multiple batteries.
- **Local Visual Display**  
Streamlined setup and easy configuration - synchronize SOC across batteries effortlessly
- **Efficient Series Charging**  
Supports two batteries charging in series – halving waiting times.
- **Safety First**  
Embedded with overcharge protection – promotes safe, sustainable battery usage.

For more information, please contact us

www.solaxpower.com  
AU: +61 1300 476529  
DE: +49 6142 4091664

Global: +86 571-56260008  
UK: +44 2476 586998  
NL: +31 (0) 852 737932

info@solaxpower.com  
service@solaxpower.com



# T-BAT-CHARGER

## Electrical Characteristics


Max. AC Input Apparent Power [VA]	2200
Max. AC Input Current [A]	10
Nominal AC Voltage (AC Voltage Range) [V]	220 (180~264)
Nominal Grid Frequency Range [Hz]	47-63
Efficiency	90%
Surge Current (230V Cold Start) [A]	60
Output Voltage Range [V]	40-150
Charging Current Range [A]	0-12
Voltage Accuracy	1%
Max. Number of Batteries Supported	2PCS

## Operating Conditions

Enclosure Protection	IP20
Operating Temperature Range [°C]	0 to 50
Relative Humidity Range	20%RH to 90%RH (Non-condensing)
Storage Humidity Range	10%RH to 95%RH (Non-condensing)
Storage Temperature Range [°C]	-40 to 85
Cooling Type	Smart Cooling

## Compatible Batteries

T-BAT-SYS-HV-5.0    T-BAT-SYS-HV-R25/36    T-BAT-5.8 V1/V2  
 T-BAT-SYS-HV-3.0 V1/V2    T-BAT-6S    T-BAT-SYS-HV-S25/36

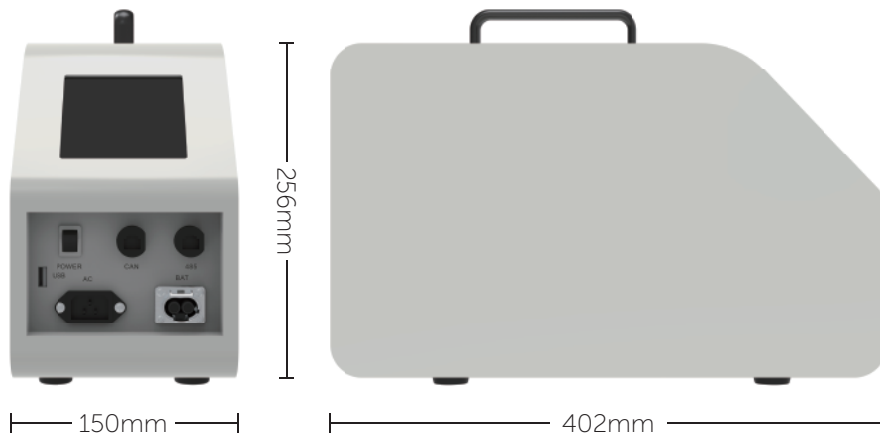

## Specification

Length [mm]	402
Width [mm]	150
Height [mm]	256
Weight [kg]	7.1